


New Gas Kit for the Milestone DMA-80

A new module for the determination of mercury in gases is available for the Milestone DMA-80. Gas samples are collected by a syringe or by Tedlar gas sampling bags, and then directly introduced in the DMA-80. A schematic representation of the entire process is shown below.

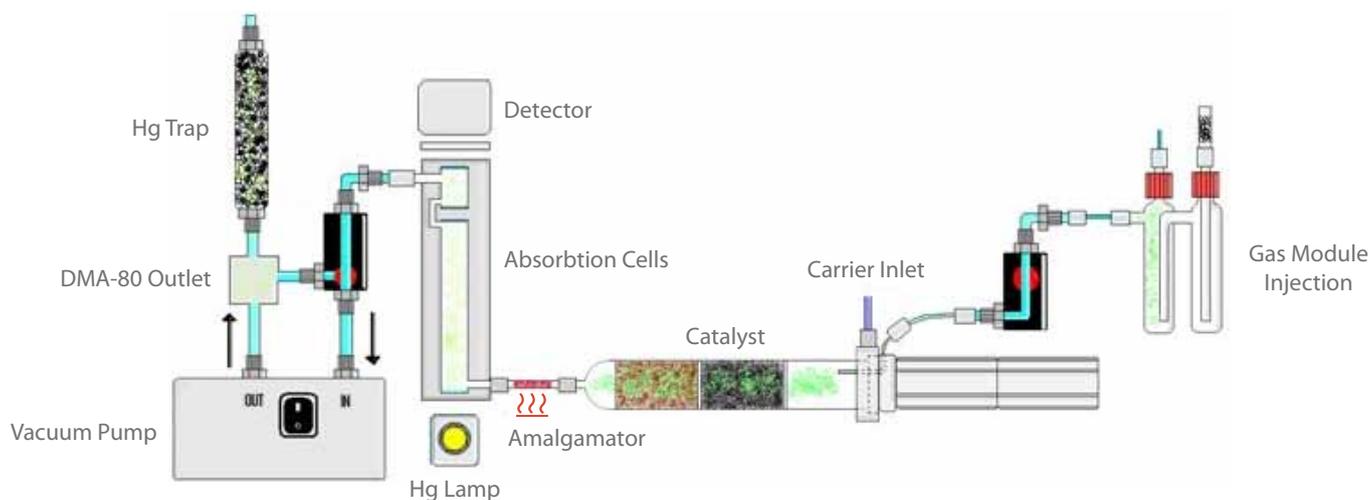

The gas kit consists of an injection block and a vacuum pump, which allow the flowing of the sample through the DMA-80 furnaces, amalgamator and spectrometer.

Benefits

- » Direct mercury determination at trace level in gases
- » Fast analysis: approximately 3 minutes per sample
- » Wide dynamic range: from 0.015 to 1200 $\mu\text{g}/\text{cubic meter}$
- » Ease of use

Applications

Environmental



- Health and Safety
- Hazmat mercury response
- Workplace monitoring
- Mercury spill screening
- Mercury surveys
- Investigation of contaminated sites
- Environmental monitoring
- Hazardous waste inspection

Petrochemical



- Natural Gas
- Biogas
- Gas processing

Performance specifications

Data	DMA-80 Dual-Cell		DMA-80 Tri-Cell	
	Total Hg (ng)	Hg concentration* ($\mu\text{g}/\text{m}^3$)	Total Hg (ng)	Hg concentration* ($\mu\text{g}/\text{m}^3$)
Working range	(1 st) 0.05-20 (2 nd) 20-1200	(1 st) 0.05-20 (2 nd) 20-1200	(1 st) 0.015-10 (2 nd) 10-20 (3 rd) 20-1200	(1 st) 0.015-10 (2 nd) 10-20 (3 rd) 20-1200
Detection limit	0.005		0.0015	

* Sample volume = 1 liter

Sorbent Traps

for the Milestone DMA-80

Sorbent traps are available for the Milestone DMA-80 to measure the mass concentration of Mercury in gases, including elemental Mercury (Hg^0) and oxidized forms of Mercury (Hg^{+2}) in micro-grams per dry standard cubic meter ($\mu g/dscm$). Gases are collected onto the sorbent tubes by specific devices first.

At the completion of the sampling process, the sorbent tubes are directly placed on the DMA-80 auto-sampler and analyzed.



Benefits

- » High quality analysis
- » Low mercury effect
- » High recovery > 98.5 % at 1000 ng
- » High recovery for both Hg^0 and Hg^{+2} forms
- » High recovery in presence of moisture
- » Reusable sorbent traps
- » Easy to use: simply place it on the autosampler
- » Best quality-price

Performance specifications

Sorbent trap	300 mg Adsoquick
Reusable sorbent trap	Up to 10 times
Flow rate	Up to 300 mL/minute
Recovery (up to 10 ng Mercury)	> 99.1%
Recovery (up to 100 ng Mercury)	> 99.2%
Recovery (up to 1000 ng Mercury)	> 98.5%
Reproducibility	< 2%

MILESTONE



HELPING
CHEMISTS

MILESTONE Srl - Via Fatebenefratelli, 1/5 - 24010 Sorisole (BG) - Italy
Tel: +39 035 573857 - Fax: +39 035 575498
www.milestonesrl.com - email: analytical@milestonesrl.com

UNI EN ISO 9001:2008 CERTIFIED - Registration N° 0513907

MILESTONE INC. - 25 Controls Drive - Shelton, CT 06484 - USA
Tel: (203) 925-4240 - Toll-free: (866) 995-5100 - Fax: (203) 925-4241
www.milestonesci.com - email: mwave@milestonesci.com

MILESTONE GENERAL K.K. - KSP, 3-2-1, Sakado - Takatsu-Ku,
Kawasaki 213-0012 - Japan - Tel: +81 (0)44 850 3811 - Fax: +81 (0)44 819 3036
www.milestone-general.com - email: info@milestone-general.com

MLS GmbH - Auenweg 37 D-88299 Leutkirch im Allgau - Germany
Tel: +49 (0)7561 9818-0 - Fax: +49 (0)7561 9818-12
www.mls-mikrowellen.de - email: mws@mls-mikrowellen.de

In your country:

